

Special Alignment Clamps

Internal and external locking pipe clamps for aligning pipes and flanges

The ideal solution for:

- fast, safe and accurate centring and clamping of tubes, shafts and round bars right from the start;
- quick and accurate alignment and clamping of flanges, nozzles and short pipe sections to pipes.

Pincer Clamp SS Ready

For quick and accurate alignment of pipes of equal or differing diameters on a common centre line. Automatic diameter compensation. All parts stay easily accessible for welding.


Part No.	Clamping Range (mm)	Weight (Kgs/lbs)
PC70SS	10-70	2.1/5
PC140SS	40-140	5.9/135
PC330SS	75-330	26/57.5



FTP Clamp SS Ready

This model has two independent expanding clamps, allowing coaxial alignment of two hollow cylindrical components of different diameters. The bottom expanding clamp is inserted and clamped in the pipe by means of the knob. Then the other part (e.g. a flange) is placed over the top expanding clamp and clamped by means of the hand-bar.

Part No.	Clamping Range (mm)	Weight (Kgs/lbs)
FTP140SS	54-140	1.30/28.6
FTP220SS	85-220	3.90/86
FTP350SS	120-350	11.5/253.5
FTP520SS	180-520	27/59.5
FTP940SS	400-940	39.00/85.98

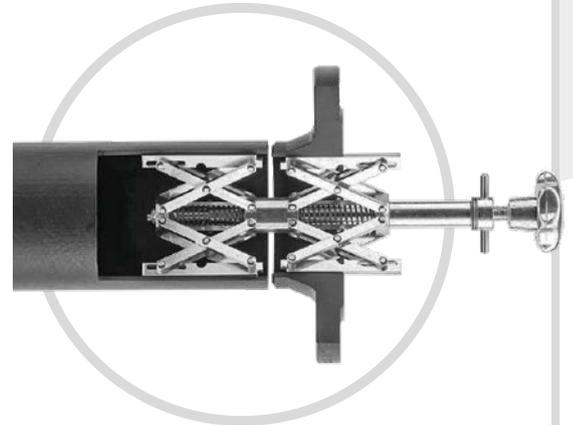

FTE Clamp SS Ready

This model with two independent clamps is used for clamping flanges of all kinds and similar parts to elbows and pipe-bends of various diameters. The lower expanding clamp has strong gripping feet which insert into the bend and are tightened by means of the knob. The top expanding clamp is tightened by means of the handbar in the flange.

Part No.	Clamping Range (mm)	Weight (Kgs/lbs)
FTE115SS	54-115	1/3
FTE195SS	89-195	3.3/7
FTE315SS	120-315	9.5/21
FTE520SS	180-520	23.1/50.8

